



TripleAir 55mm Walk On Tee Grid System – GASKET

TripleAir 55mm T-Bar grid is a heavy-duty Cleanroom ceiling in a modular frame construction for nonpressurized plenum applications, consisting of main and cross runners, connected to precision die-cast joints to form a nodal system. It can be used as a walk-on construction, as the ceiling panels have high deflection strength. The aluminium extrusions come as standard with an anodised surface treatment (colour grey), although option for RAL9010G powder coated finish is available. Die-cast joints are painted a matching colour.





TripleAir 55mm T-bar extrusion profiles and joints have an identical geometry, allowing for a tight connection and preventing uncontrolled particle deposition during installation. Cruciform joints have penetrations suitable for cables, sprinklers or a closed insert. Tee joints and corners are available as casting without penetration.

The 55mm aluminium main and cross runners come with a sliding track at the cleanroom side, to allow for suspended installation of teardrop lights, aprons or partitions, with an MIO T bolt. If a flush design is required, the sliding track will be closed with a 5mm closing profile. Connection of suspension hangers can take place at any point in the extrusion, utilizing half round drop-in nut. All ceiling filter elements, such as filters and lay-in lights, shall be installed from the deck of the ceiling grid, minimizing interruptions in the Cleanroom. Gaskets between ceiling grid and filters, blanks and other inserts are provided for with a one-side adhesive gasket.

Clean Room Filtration and Lighting Technology

TripleAir Technology are suppliers of high quality HEPA and ULPA filtration, ceiling grid systems and luminaires for the clean room industry. We offer fully integrated ceiling solutions for projects and cleanroom facilities.

T +44(0)1670 739394 E info@tripleairtechnology.co.uk

Document TAT008-1

tripleairtechnology.co.uk



TripleAir HD 55-70 CEILING Grid (walk on)

The TripleAir 55-70 HD Grid is suitable for the installation of the

following products:-

TripleAir Fan Filter Units.

HEPA/ULPA filters & TripleHood Filter Modules

Blank panels & acoustic panels

Integrated recessed luminaires


Teardrop luminaires.

Sprinkler heads (in the die-cast crossjoints)

Electrical conduit and media piping (in the die-cast cross joints)

Air deflection Curtains

Cleanroom partitions



Profile Properties

Moment of Inertia X-X	l=257,200mm ⁴
Moment of Inertia Y-Y	l=53,580mm ⁴
Area	480.8mm ²

EPDM Gasket (DEW1425) Specification:-

Properties ASTM DI056 (2000) Density Compression Deflection 25% (35-63) Compression Deflection 50% (80-160) Shore Hardness "OO" scale Elongation – minimum Temperature range (Constant) Temperature range (Intermittent) Water Absorption Tensile Strength Flame Resistance Average Values 2A2C 140kg/m3 40 kPa 100 kPa 35-40 >200% -40degC / +80degC +100degC < 5% Vol > 600kPa FMVSS302 Self Extinguishing CFC & HCFC free

STANDARD FEATURES:-

- Anodised or painted finish
- Die Cast Joints
- 600x1200mm centres
- Own weight appx 15kg/m2
- Point load 120kgs (1.2kN)
- Maximum uniform load 200kgs/m2 with 3mm deflection
- 1200x800mm hanger centrelines
- M10 hanger (turnbuckle down)
- 37mm perimeter angle trim
- Fixing accessories
- EPDM gasket (white)
- Overall ceiling element = grid dimension minus 30mm (max)

OPTIONS:-

- RAL9010G epoxy powder coating
- Alternative paint colours
- 1200x1200mm & 600x600mm centres
- Threaded bar
- Blank pans
- Perforated pans
- Honeycomb panels
- Tread plates for walk-on locations
- Hold down clamps for pans
- Diffusers
- Compatible Recessed Luminaires
- Teardrop luminaires
- Air deflection curtains
- Gel seal see relevant spec sheet

Clean Room Filtration and Lighting Technology

Visit our website to view our full range of HEPA and ULPA filters, safe change units, fan filter units, ceiling grid systems and cleanroom luminaires.

T +44(0)1670 739394 E info@tripleairtechnology.co.uk

Document TAT008-1


Environmental Protection

tripleairtechnology.co.uk



TripleAir HD 55-70 CEILING Grid (walk on)

Ceiling Assembly

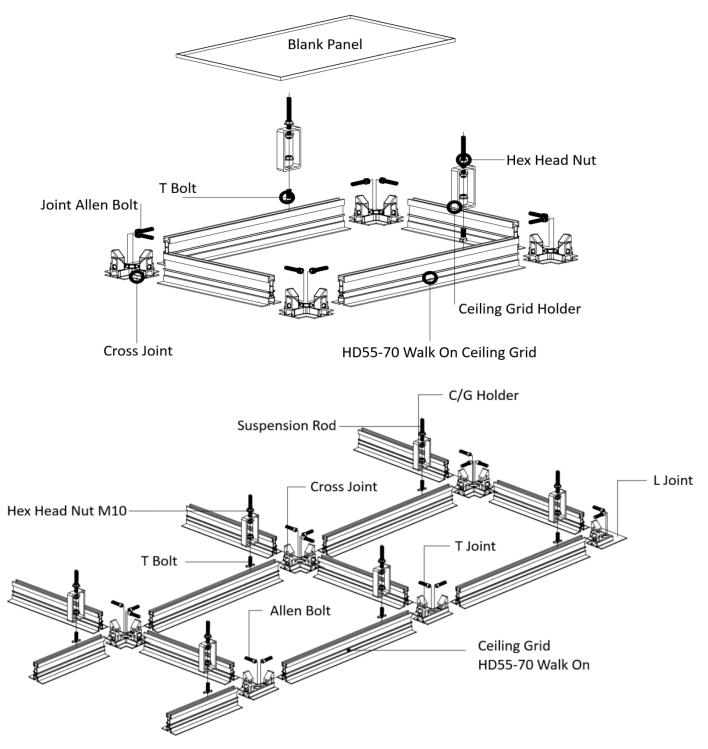

Clean Room Filtration and Lighting Technology

Visit our website to view our full range of HEPA and ULPA filters, safe change units, fan filter units, ceiling grid systems and cleanroom luminaires.


T +44(0)1670 739394 E info@tripleairtechnology.co.uk

tripleairtechnology.co.uk

Document TAT008-1



TripleAir HD 55-70 CEILING Grid (walk on)

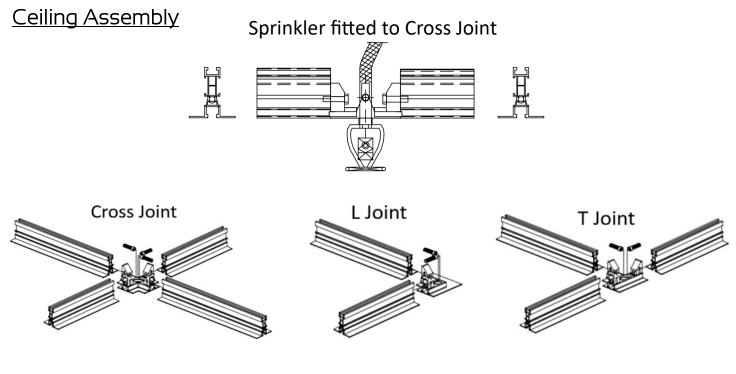

The HD Grid can accommodate fixings and hangars—room side. By simply removing the central cover to reveal a sliding track to which hangars and fixings can be fitted to support other services within the room.



Related Products

Fan Filter Units



Hood Filters

Teardrop |Luminaires

Recessed Luminaires





TripleAir Technology Ltd (Sales, Engineering & Manufacture) 41A Colbourne Crescent, Nelson Park Industrial Estate, Cramlington, England, NE23 1WB. T +44(0)1670 739394 E info@tripleairtechnology.co.uk Document TAT008-1





tripleairtechnology.co.uk